

CITIZEN


Cincom

R01/04

Sliding Headstock Type Automatic CNC Lathe



Cincom's answer for machining ultra-small-diameter precision components

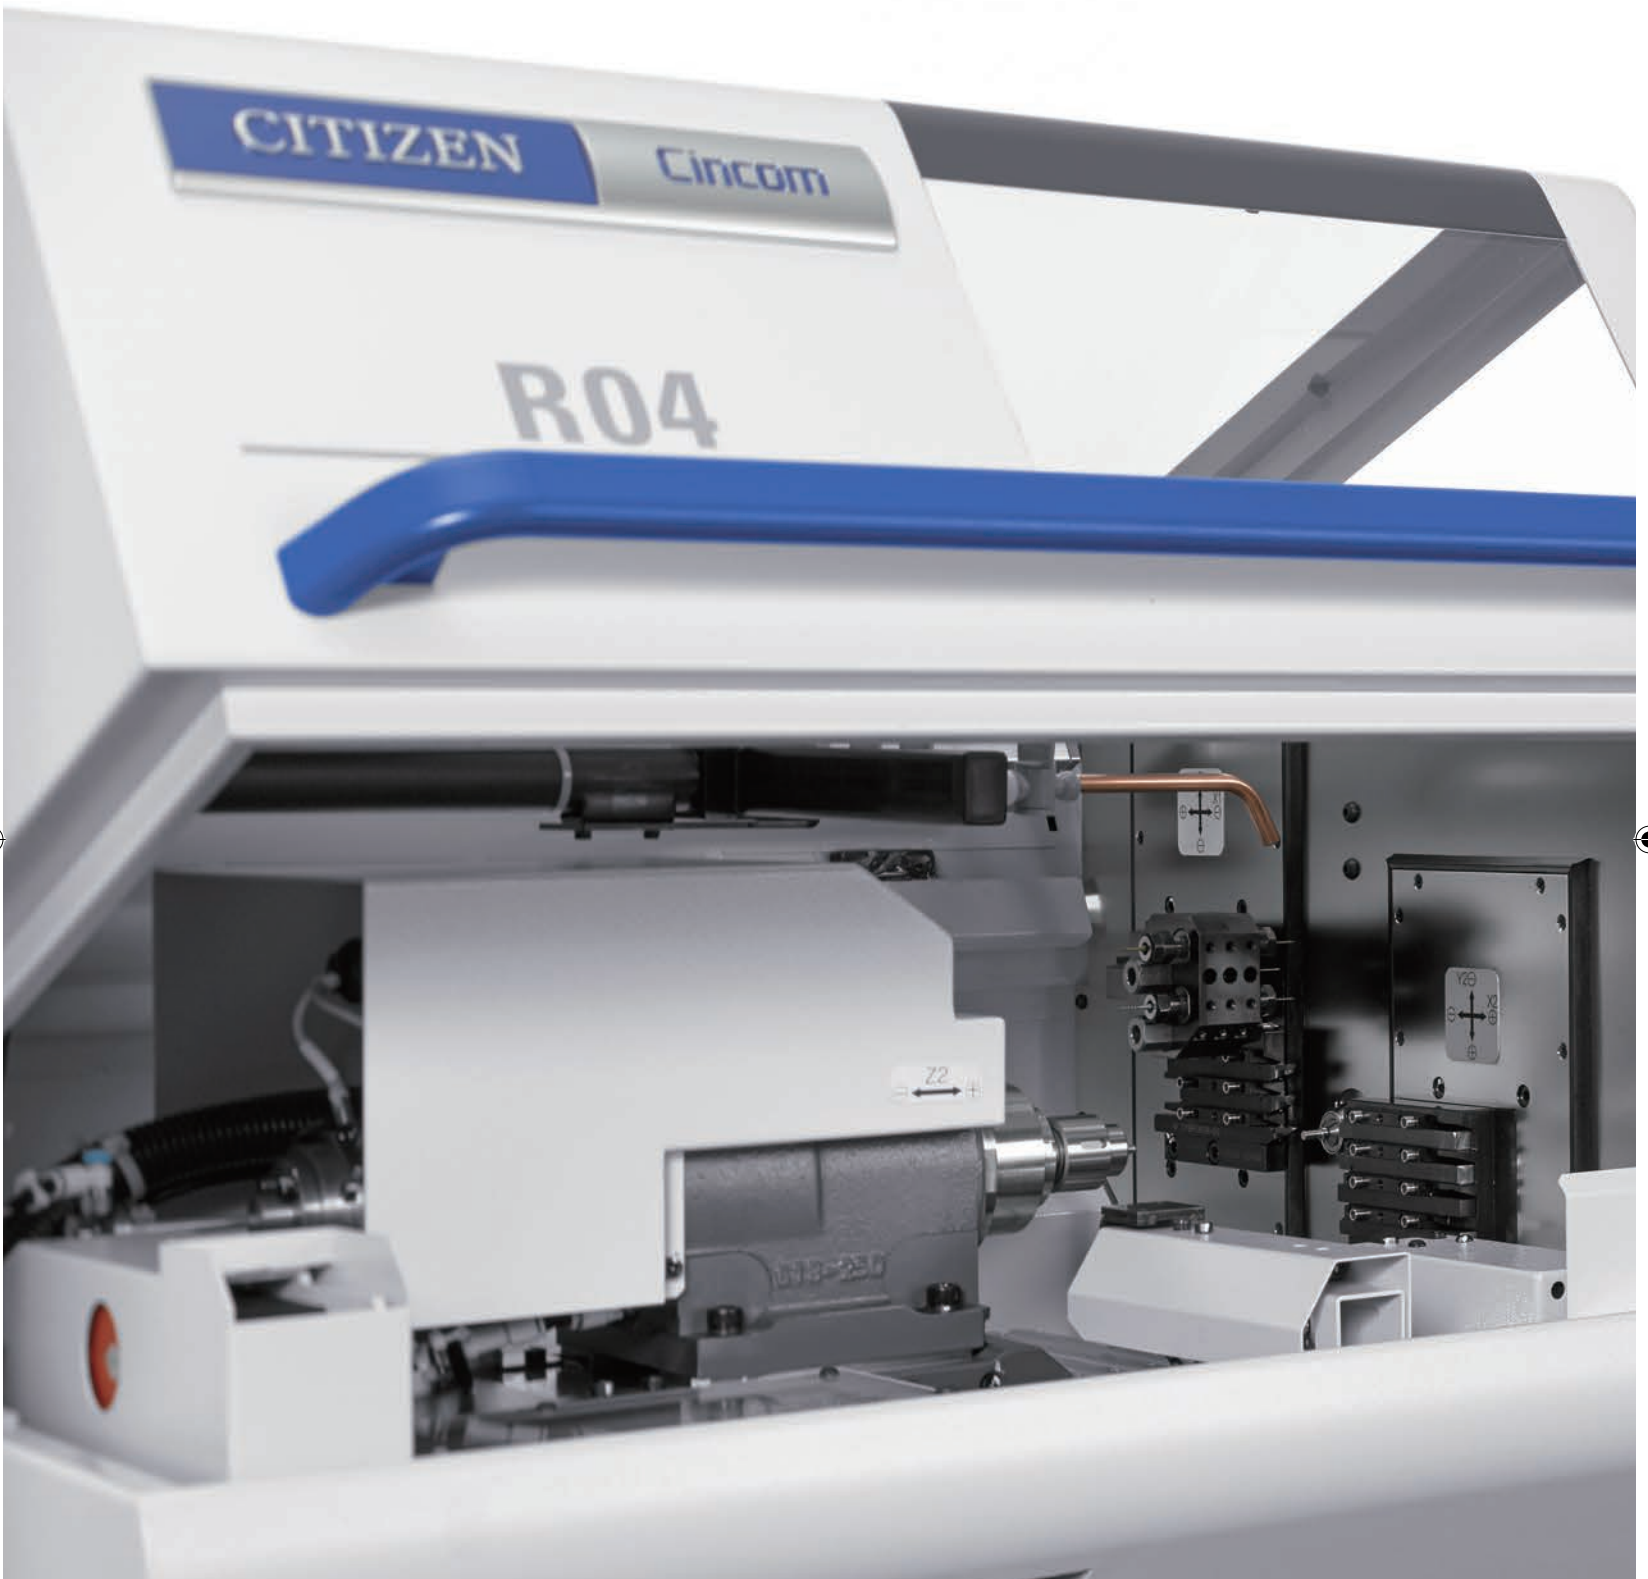

The acclaimed R-series of automatic lathes dedicated to small-diameter machining has evolved. For machining watch parts, probe/connector pins, medical parts and other ultra-small-diameter components, we completely reviewed the machine construction in pursuit of 'the ideal machine' with 'true-ease-of-use'. A 20,000 min⁻¹ spindle achieves the optimum cutting speed for the workpiece. This in combination with a tool post integrated with the guide bushing mount to suppress thermal displacement and feed axis drives combining linear and servo motors help to maximise accuracy, compactness and low energy consumption. Cincom's solution for machining ultra-small-diameter parts is here.




Rigid, thermally stable construction

With a new modular design concept, the lineup comprises two models each having two types. The R01 specializes in machining materials up to 1 mm and the R04 up to 4 mm. Type II machines are dedicated to front machining, and Type VI are equipped with common spindle modules for both


the front and back spindles. Suppression of thermal displacement has been pursued throughout the machine. The components to mount the tool slide and the guide bushing unit are unified to suppress thermal displacement and assure rigidity. Alternative, optional tool layouts are available.

Basic construction and axis configuration

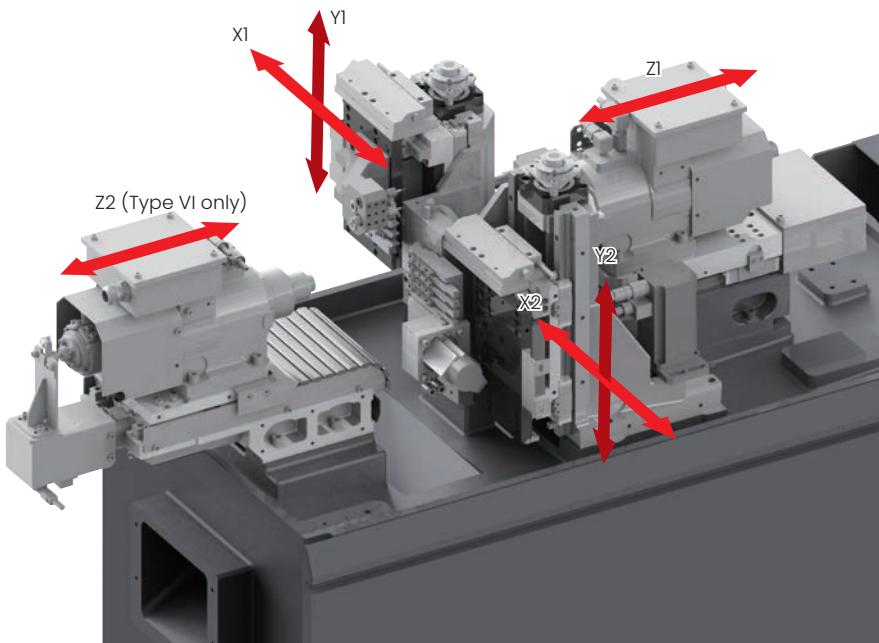


Type II

- Front spindle : 1
- Drilling tools : 4
- Turning tools : 1
- Rotary tools : 2

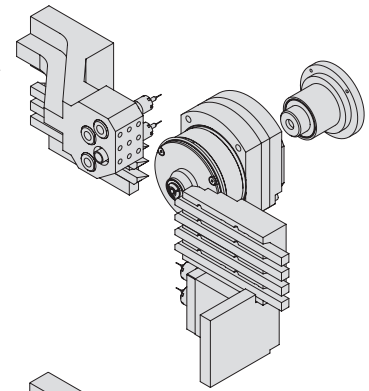

Type VI

- Front spindle : 1
- Back spindle : 1
- Drilling tools : 8
- Turning tools : 7
- Rotary tools : 2

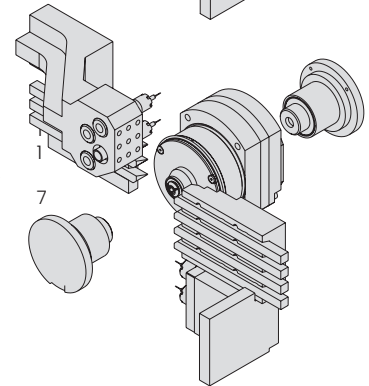


Compact high performance 20,000 min⁻¹ spindles


Spindles that are 25% more compact and lighter than previous models, have low vibration and fast acceleration/deceleration. Ceramic bearings improve high-speed stability. Both main and back spindles are identical

and are oil-cooled to reduce heat generation. Chucking force is programmable. Cycle times are further improved by latest NC system with 'Cincom Control' which drastically reduces processing time.

Example

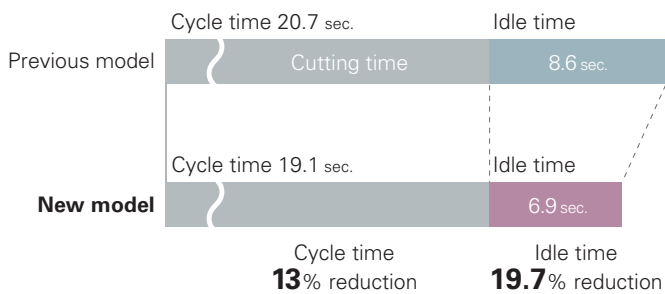

Spindle on previous model

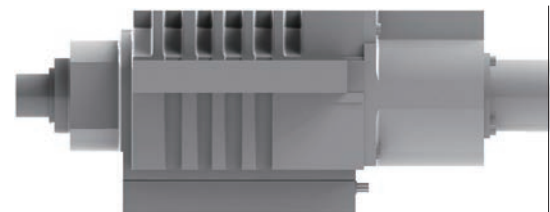

New R model spindle




Machining

In comparison with previous models, the twin gang tool mounting capacity is increased by two turning tools and one drilling tool, thus improving the feasibility of tool layout.


The rotary tools with significantly increased

rigidity adopt ER11 size chucks. With the tool shift amount changed to 2 mm, material deflection is suppressed.

The guide bushing unit is now available as 'fixed type', 'fixed open/close type' or 'rotary type', expanding the machining range.

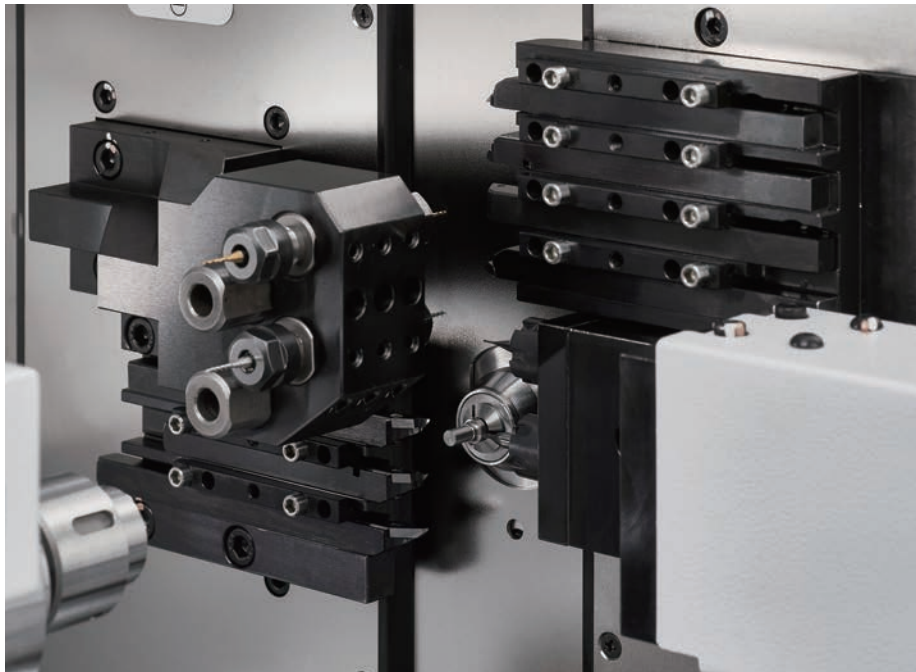

Connector pin 1.5 mm dia., L = 10 mm

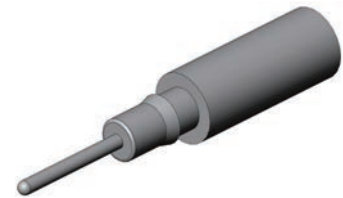

Probe pin 0.4 mm dia., L = 5 mm



Watch part 0.3 mm dia., L = 1.5 mm




Space-saving design; reduced running cost

A machine depth of 535 mm has been achieved by the adoption of compact spindle motors, linear motors for X axes and a new cover design. This increases machine density in a given floor area. The latest hinged cover design simplifies maintenance and fully encloses peripheral equipment. Air and power consumption is reduced through servo motor drives to Y axis, centralised lubrication to all slides and higher efficiency motors and pumps. Lubrication consumption is reduced by 12% compared to previous R model.




Improved collection rate of extremely-small-diameter workpieces

Micro-sized workpieces are difficult to collect due to their small size. For the new R series, a non-contact air blow collection and chute for small workpieces has been developed in addition to the previous knockout and suction methods for product collection. All are supplied as standard on the R01. In conjunction with optimization of the coolant discharge rate, the efficiency of component collection is improved.

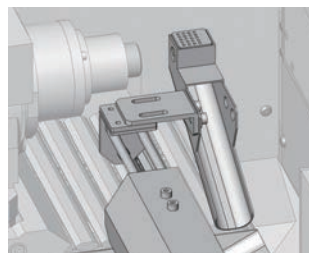

Back collection chute with air blow system

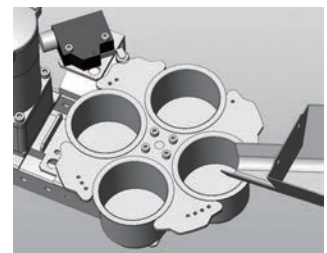


4-division workpiece separator system

Display screens for ease-of-use




High-speed NC unit

The latest NC unit drastically reduces the start-up and screen switching time compared to other advanced function machines.

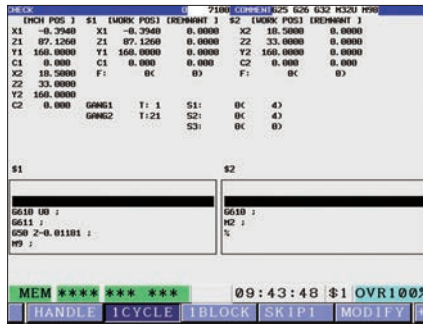


On-machine program check function

Using manual handle feed, operations can be run in forward or reverse directions. You can temporarily stop program operation, edit the program and then restart operation.

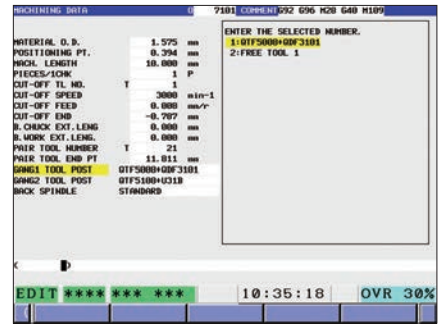


Machining data

Displays the data of the required machining program item by item.

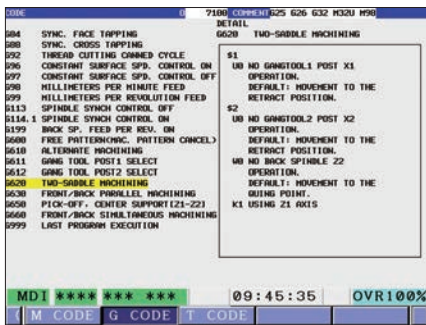


Code list display

Displays the list of G and M codes including explanations to aid programming.

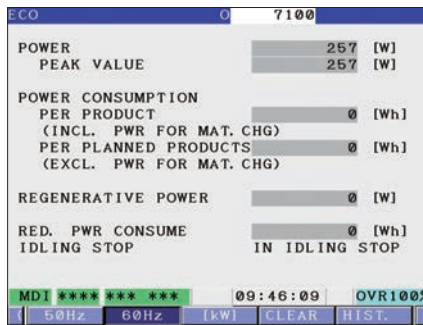

Eco screen

Displays the current power consumption, cumulative power consumption, power regeneration status, etc.

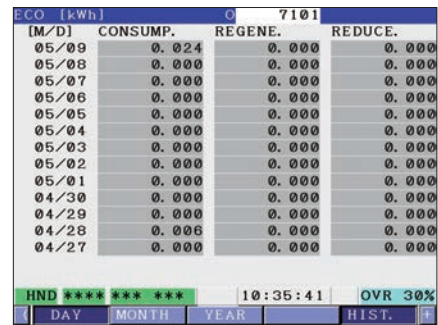

Electric energy history display


Saves the electric energy history by date which can be output as a csv file as necessary.

Options




In-machine lighting

The interior of the machining area is illuminated by an LED lamp, making it easier to change tools and to check cutting. Additional external lighting may be specified.

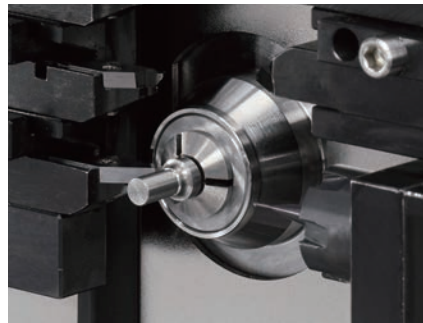


Open/close type guide bushing device / rotary guide bushing device

In addition to the open/close type that has made adjustment easier than with conventional models, the rotary guide bushing device is now available with all R01/R04 models.

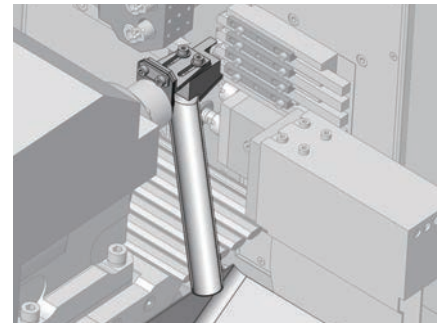



Front collection chute

Coolant is run through a semi-circular chute mounted on the back spindle, and workpieces cut-off during front machining are collected. Applicable to workpieces with O.D. up to 2 mm dia. and length up to 20 mm. (Type V1 only)

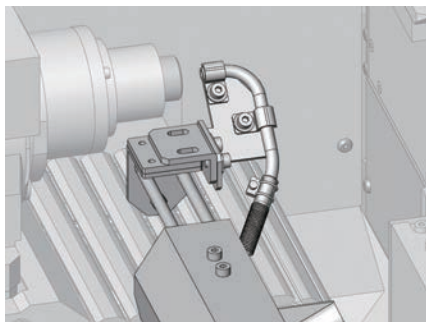

Suction type separator


This workpiece separator improves the collection rate of extremely small workpieces and is effective in separating chips from the workpiece collection section. Applicable to workpieces with O.D. up to 1 mm dia. and length up to 5 mm.

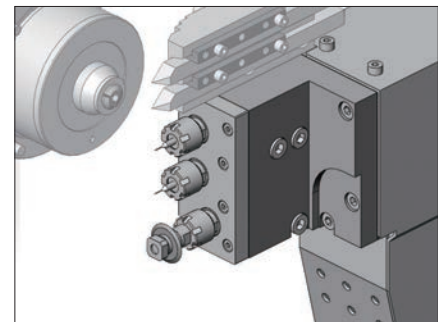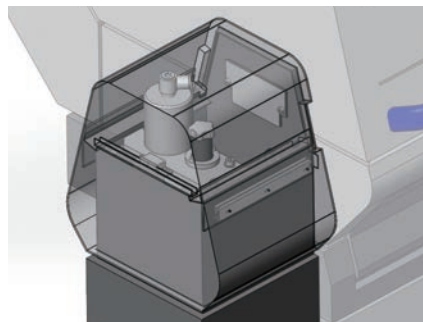


3-rotary gang tool driving unit (U34B)

Accommodates three rotary tools (ER11). Two are 2 mm shift and one is 10 mm shift.


Tooling Layout

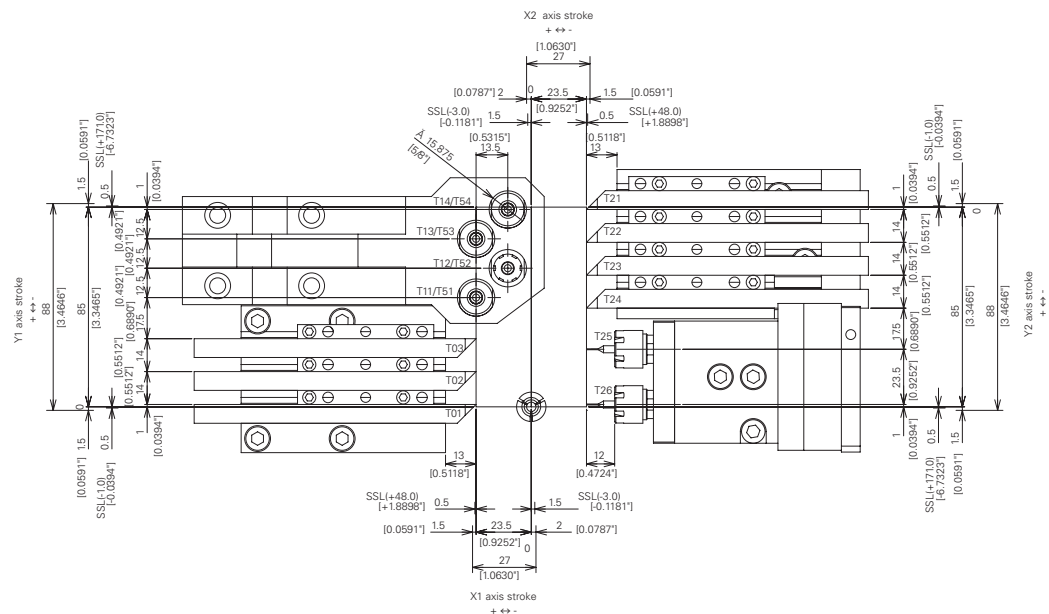


Type II

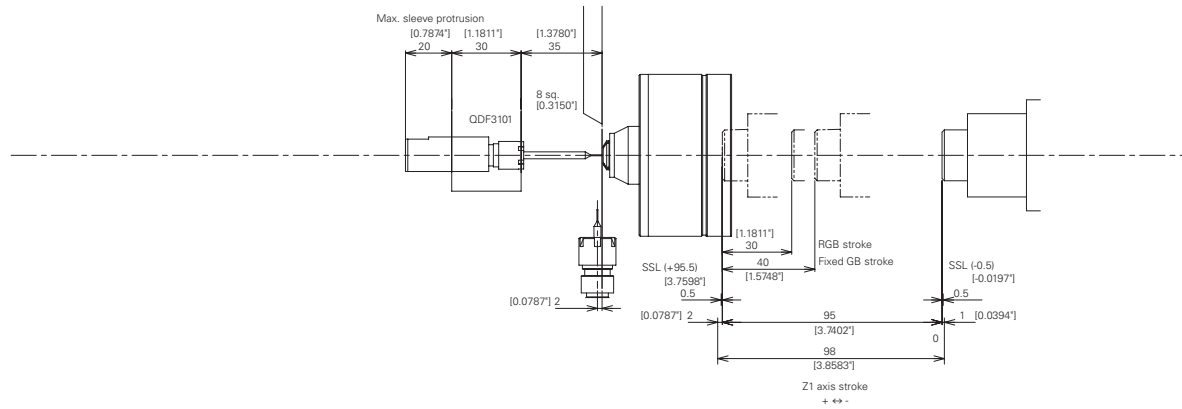

Type VI

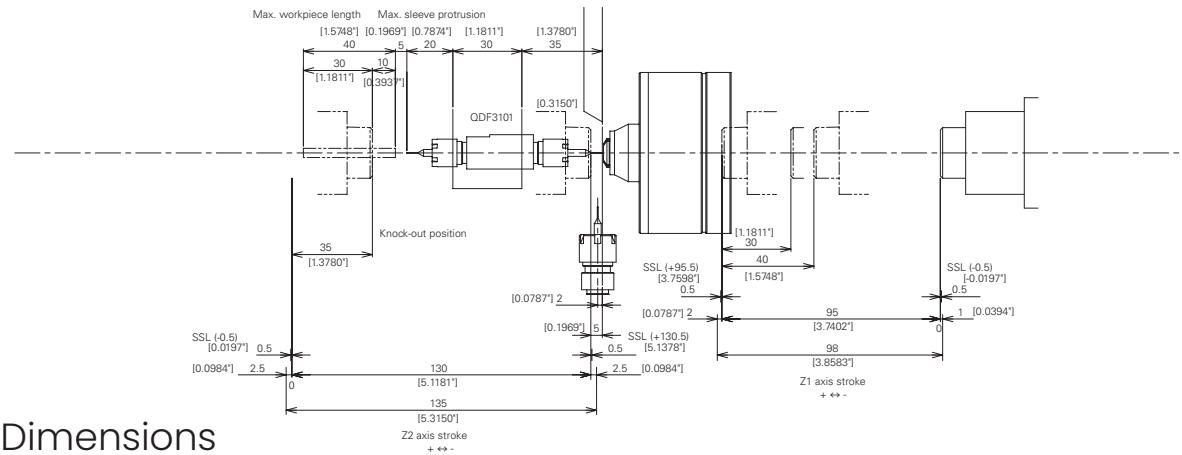

External Dimensions

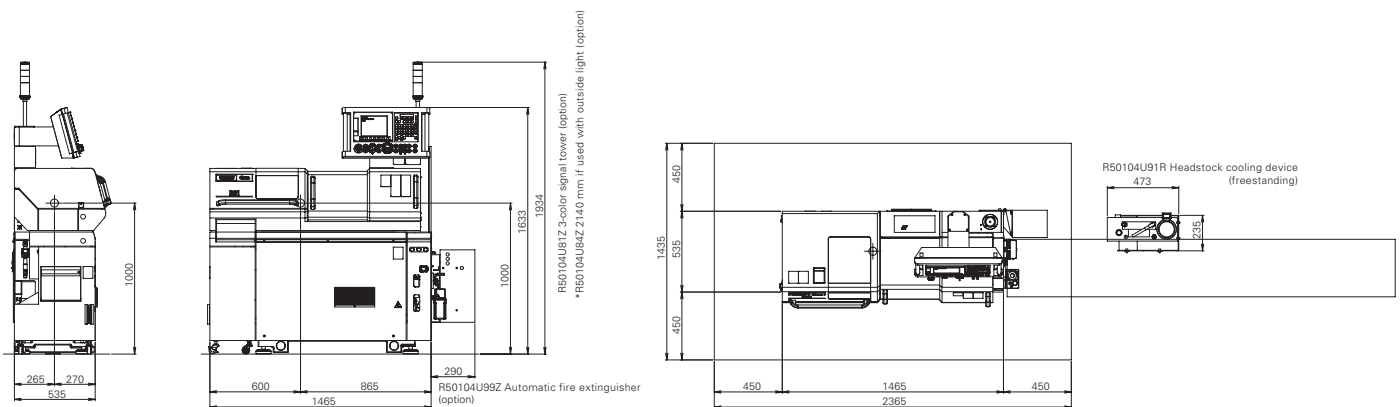

Machine Specification

	R01-5F2	R01-5F6
Max. machining diameter (D)	1 mm / 4 mm dia.	
Max. machining length (L)		
Fixed guide bushing	20 mm / 40 mm	
Rotary guide bushing	20 mm / 30mm	
Max. front drilling diameter	3 mm dia.	
Max. front tapping diameter	M3 (cutting tap)	
Spindle through-hole diameter	10 mm dia.	
Spindle speed	Max. 20,000 min ⁻¹	
Max. chuck diameter of the back spindle	-	1 mm / 4mm dia.
Max. workpiece protrusion length from the back spindle	-	10 mm
Maximum collectable part length	20 mm / 40 mm	
Max. drilling diameter in the back machining	-	3 mm dia.
Max. tapping diameter in the back machining	-	M3
Back spindle speed	-	Max. 20,000 min ⁻¹
Rotary tool on the gang tool post		
Max. drilling diameter	2 mm dia.	
Max. tapping diameter	M2 (cutting tap)	
Spindle speed	Max. 8,000 min ⁻¹	
Number of tools mountable	13	17
Turning tool	7	7
Rotary tool on the gang tool post	2 (3 rd)	2 (3 rd)
Front drilling tool	4	4
Back drilling tool	-	4
Tool size		
Tool (gang)	8 mm sq.	
Sleeve	15.875 mm sq.	
Chucks / bushings		
Spindle collet chuck	FCD08-M	
Back spindle collet chuck	-	FCD08-M
Rotary tool collet chuck	ER11	
Chuck for drill sleeves	ER8, ER11	
Guide bushing	WFG044-M	
Rapid feed rate		
All axes	30 m/ min	
Motor		
for spindle drive	0.5/ 0.75 kW	
for rotary tool on the gang tool post	0.1 kW	
for back spindle drive	-	0.5/ 0.75 kW
for coolant	0.06 kW	
for lubrication	0.003 kW	
Centre height	1,000 mm	
Rated power consumption	2.3 kVA	3.4 kVA
Full-load current (main breaker capacity)	5 A(20 A)	10 A(20 A)
Pneumatic device Required pressure,		
Required flow rate	0.5 MPa, 32 NL/min (At power ON) / 70 NL/min (in normal state) / 136 NL/min (During air blow)	
Machine footprint	1,465 × 535 × 1,633 mm	
Weight	1050 kg	1100 kg

Standard Accessories

Spindle chucking device
Back spindle chucking device *Only for type VI
Headstock cooling device
Rotary tool spindle drive device of the gang tool post
Coolant device (with level detector)
Lubricating device (with level detector)
Workpiece separator
Longitudinally adjustable fixed guide bushing device
Machine relocation detector

Special Accessories

Open/close guide bushing device	Knock-out jig for through-hole workpiece
Suction-type workpiece separator	Compact (4-division) workpiece separator
Cut-off tool breakage detector	Signal lamp
3-colour signal tower	Coolant flow rate detector
Work light	Magnet-equipped filter

Standard NC Functions

Axis feed overlap function	Preprocessing function
In-machine tool set function	On-machine program check function
Manual data input (MD) function	Manual feed function
Background edit function	Display of code list
Part count function	Cycle time check function
Automatic backlight turning-off function	Input/output interface
Door open detection function	Door lock function
Automatic power-off function	Optional stop
Memory protection function	Interference check function
Machine lock	Chamfering ON / OFF
Exact stop check	Error detect ON / OFF
Tool offset I/6 pairs	Subprogram call function
Spindle speed fluctuation detection function	Spindle constant surface speed control function
Continuous thread cutting	Thread cutting canned cycle
Back spindle pick-off failure detection function	Program storage capacity 40 m (16 KB)
Sub-microns command	Spindle 15° indexing function
Optional block skip	Chamfering/Corner rounding
Nose radius compensation	Canned cycle drilling
Multiple repetitive cycle for turning	

Special Additional NC Functions

Spindle C-axis function	Spindle synchronised tapping function
Spindle synchronised control function *Only for type VI	Spindle 1° indexing function
Back spindle synchronised tapping function	Back spindle 1° indexing function *Only for type VI
Back spindle C-axis function *Only for type VI	Rotary tool synchronized tapping function
Cut-off tool breakage detection function program	B code I/F
Tool offset pairs 32 pairs	Tool life management I
User macro	Tool life management II
Polygon machining function	Program storage capacity 80 m (32 KB)
Variable lead thread cutting	Program storage capacity 120 m (48 KB)
Optional block skip (9 sets)	Program storage capacity 160 m (64 KB)
Sub inch command	Program storage capacity 320 m (128 KB)
Drawing dimension direct input	Program storage capacity 600 m

Citizen Machinery UK Ltd

1 Park Avenue, Bushey WD23 2DA, UK
 Hurst Business Park, Narrowboat Way, Brierley Hill DY5 1UF, UK
 Tel. +44 (0) 1923 691500 | sales@citizenmachinery.co.uk

www.citizenmachinery.co.uk

ASIA

Headquarter Japan | Citizen Machinery Co., Ltd., 4107-6 Miyota, Miyota-machi, Kitasaku-gun, Nagano-ken, 389-0206, Japan, Tel. +81-267 325 901

EUROPE

Headquarter Europe | Germany | Mettinger Straße 11, 73728 Esslingen, Tel. +49-711 3906 100 | France | Citizen Machinery France S.A.S., ZAE des Lacs 3, 1385 Avenue du Mole, 74130 AYSE, France, Tel. + 33-450 985 269 | Italy | Citizen Macchine Italia s.r.l., Via Campo Romano 11/13 - 24050 Spirano (BG), Italy, Tel. +39-035 877 738 | Spain | Egasca, S.A., Poligono Industrial Erisono 2, 20600 Eibar, Gipuzkoa, Spain, Tel. +34-943 200 300 | UK | Citizen Machinery UK Ltd., 1 Park Avenue, Bushey, WD23 2DA, UK, Tel. +44-1923 691 500

Images may differ from the original. Technical data is subject to change without notice. The product falls under the export regulations and is subject to the foreign exchange and external trade law. Before exporting this product please refer to your CITIZEN dealer. Please also contact your CITIZEN dealer before you intend to resell, export or take this product somewhere else. Any copy of this product no matter whether in whole or in parts as well as its relating technologies and software is forbidden. In case of export the export licence issued by the competent authorities has to be presented to CITIZEN. The machine operation may be started upon confirmation and approval by CITIZEN. CITIZEN is a registered trademark of Citizen Watch Co. Japan. Subject to technical changes and error. Specifications only apply to the European market. Published 03/2026.